600 x 1200mm

GLAZED VITRIFIED TILES



WALL • VITRIFIED

N COMPANY PROFILE

Since our investiture in 2007, Nexcera brought innovations in tiles and provided unique concepts for the well being of home kind. In this 10 years we dealt with trendy concepts with affordable costs. Now, Nexcera presents the edition of Home collection, an extensive prime selection of ideas for the home, from a varied selection of ceramic tiles. Experinece the latest and trendy concepts of our wall and floors. Now, Nexcera is empowered with coordinated team work, professional quality and happy services. Visit us to experience enrich quality and superior designs.

OUR EXPORT IN COUNTRIES



Countries we export...

KUWAIT IRAQ SAUDI ARABIA OMAN QATAR AUSTRALIA BRAZIL SOUTH AFRICA SRI LANKA GHANA

KENYA NEPAL





ALLONGE BROWN


PUNCH







CONCRETE NATURAL

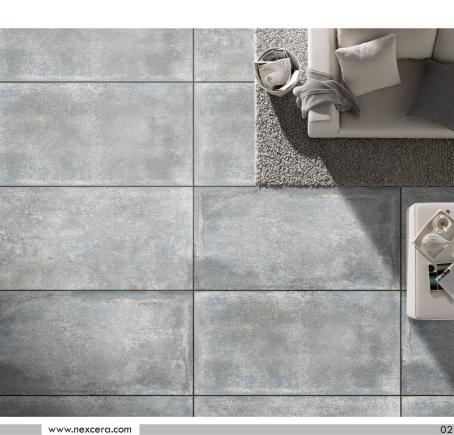



FRAME CREMA



FRAME BROWN







FRAME CREMA

PUNCH



FRAME BROWN

PUNCH







LOFT CREMA



LOFT GEOMETRIC





www.nexcera.com 05





Rustic

NexceraTM
shaping your imagination... 600X1200mm

OUTLAND GRIS






PHONIX CREMA



PHONIX CHOCO



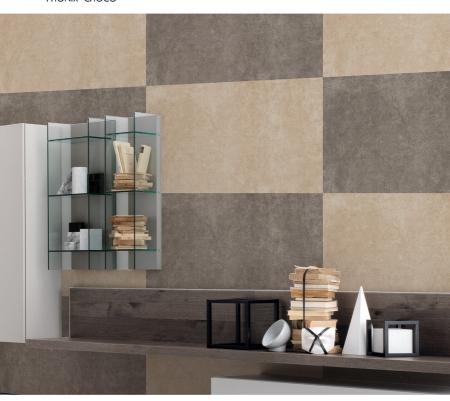



PYRUS ALMOND


PUNCH



PYRUS WOOD



08

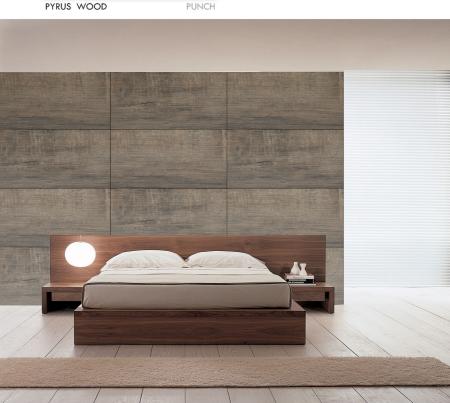



THAR IVORY



THAR CREMA







TREVER BLANCO







www.nexcera.com 1




GRAND STONE LITE



GRAND STONE DARK



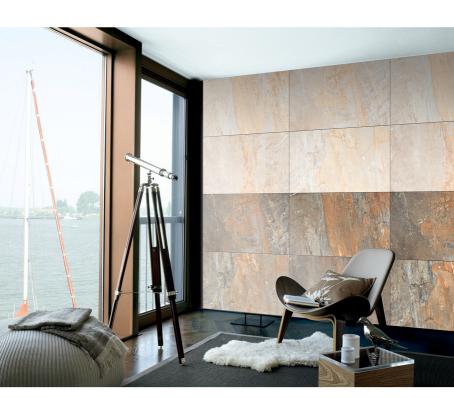



VICTORIA WHITE



VICTORIA GRIS





Conformity of Nexcera Vitrified Tiles Technical Specifications

Sr.No	Characteristics	Group B1a-ISO 13006 Annx. G	Nexcera Value	Method of Testing
1.	Deviation in Length & Width	Max. ± 0.6%	Max. ± 0.1%	
2.	Deviation in Thickness	Max. ± 5%	Max. ± 4%	
3.	Straightness of Sides	Max. ± 0.5%	Max. ± 0.1%	
4.	Rectangularity (Squareness)	Max. ± 0.6%	Max. ± 0.1%	ISO 10545-2
5.	Surface Flatness	Max. ± 0.5%	Max. ± 0.15%	
6.	Surface Quality (%)	A Minimum of 95% tiles shall be free from visible defects that would impair the appearance of a major area of tile	96% free from visible defects	
7.	Modulus Of Rupture	>35N/mm ²	≥37N/mm ²	ISO 10545-4
8.	Breaking Strength	>1300N	>1900N	
9.	Water Absorption	<0.5%	<0.06%	ISO 10545-3
10.	Impact Resistance	Test Method available	No Identification	ISO 10545-5
11.	Resistance to Surface abrasion	Report abrasion class & Cycle Passed	PEI class 3	ISO 10545-7
12.	Co-Efficient of Thermal Expansion	< 9x10 ⁻⁶	< 6x10 ⁻⁶	ISO 10545-8
13.	Crazing Resistance (Glazed Tiles)	Required	Passed 4 Cycles 7.0Kg/cm ²	ISO 10545-11
14.	Frost Resistance	Required	100 Cycle Pass	ISO 10545-12
15.	Chemical Resistance#	Manufacturer to state the class	Min GB,GLB,GHB	ISO 10545-13
16.	Stain Resistance*	Min Class 3	Min Class 3	ISO 10545-14

[#] Chemical Resistance only for house hold chemicals except HF content

Packing Detail

Dimension (mm)	Thickness (mm)	Pieces / Box	Coverage Area / Box (Sq. Mtr)
600x600	9.0	04	1.44
600x1200	10.0	02	1.44



Manufacturing unit

OMEN VITRIFIED

Head Office : Lakhdhirpur Road,

Near Canal, Morbi

Dist.Morbi (Gujarat) INDIA

: Ashok Patel :- +91 98794 81671 Contact

: Arjun Patel :- +91 98259 14268

E-mail : nexceraindia@gmail.com

: nexceraexport@gmail.com

Web : www.nexcera.com



